

# QUEST PLUS LED HB

LED GO!



220-240 V | LED |  IP66 | IK10

## TECHNICAL PARAMETERS

Ingress protection:	IP66;
Impact resistance:	IK10;
Nominal power [W]:	96.00 - 288.00
Luminous flux [lm]*:	14000 - 42000
Colour temperature [K]:	4000;
Colour rendering index:	>80;
SDCM:	≤ 3;
Electrical protection class:	I;
Energy efficiency class:	A+; A++;
Material of the body:	aluminium;
Diffuser material:	glass;
Diffuser type:	transparent;
Mounting version:	suspended; surface;

\*Tolerance +/- 10%

## CHARACTERISTICS

High-quality highbay with inbuilt LED source. The body is made of die-cast aluminium, powder coated in grey (RAL 9006), and the mounting bracket is made of black-painted steel. The diffuser is made of 5 mm thick tempered glass.

## APPLICATION

The luminaire is dedicated for surface or suspended installation (with chains) for both internal and external use. It is designed for industrial plants, production halls and large area warehouses.

# QUEST PLUS LED HB

LED GO!

## AVAILABLE TYPES

[Click >> index, to see details](#)

### QUEST PLUS LED HB surface

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Version	Dimensions [mm]	Energy efficiency class	Index
96	4000	14000	transparent	1xM	300/424/32	A+	<a href="#">&gt;&gt; 559594</a>
144	4000	21000	transparent	1xL	396/424/35	A++	<a href="#">&gt;&gt; 559570</a>
192	4000	28000	transparent	2xM	620/430/45	A+	<a href="#">&gt;&gt; 559600</a>
288	4000	42000	transparent	2xL	820/430/45	A++	<a href="#">&gt;&gt; 559587</a>

### QUEST PLUS LED HB suspended

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Version	Dimensions [mm]	Energy efficiency class	Index
96	4000	14000	transparent	1xM	300/424/32	A+	<a href="#">&gt;&gt; 559426</a>
144	4000	21000	transparent	1xL	396/424/35	A++	<a href="#">&gt;&gt; 559402</a>
192	4000	28000	transparent	2xM	620/430/45	A+	<a href="#">&gt;&gt; 559433</a>
288	4000	42000	transparent	2xL	820/430/45	A++	<a href="#">&gt;&gt; 559419</a>

\*Tolerance +/- 10%

## ACCESSORIES


Name	Index
QUEST PLUS LED M protective grid RAL9006	559907
QUEST PLUS LED L protective grid RAL9006	559914
QUEST PLUS LED HB M siatka ochronna RAL9006 zwieszanie pojedyncze	559952
QUEST PLUS LED HB L siatka ochronna RAL9006 zwieszanie pojedyncze	559945




QUEST PLUS LED M protective grid RAL9006 (559907)



QUEST PLUS LED L protective grid RAL9006 (559914)



QUEST PLUS LED HB M siatka ochronna RAL9006 zwieszanie pojedyncze (559952)




QUEST PLUS LED HB L siatka ochronna RAL9006 zwieszanie pojedyncze (559945)

# QUEST PLUS LED HB

LED GO!

## LUMINOUS INTENSITY DISTRIB. CURVE

QUEST PLUS LED HB 288W

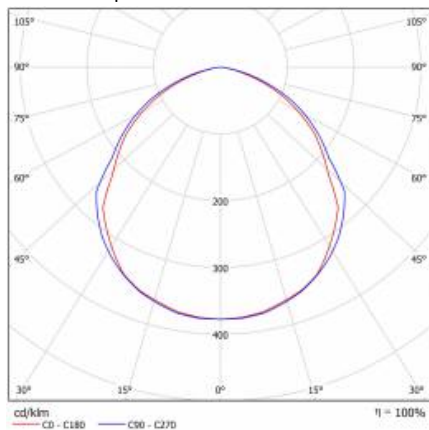

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2019-04-09



Lena Lighting S.A.  
ul. Kórnicka 52  
63-000 Środa Wielkopolska

tel. +48 61 28 60 300  
e-mail: office@lenalighting.pl  
www.lenalighting.pl



The luminaire complies with the EU RoHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



158/2018; 33/2019