


TUBE LED EVO 2

LED GO!

INDUSTRIAL LIGHTING

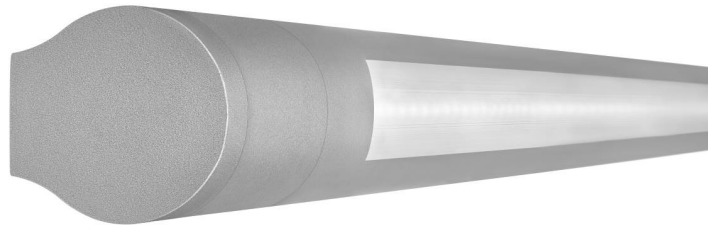

CHARACTERISTIC

Supply voltage:	220-240V
Frequency:	50 - 60Hz
Ingress protection IP:	IP65
Impact resistance IK:	IK08
Rated power:	14W - 36W
Energy efficiency class:	A, A+
Electrical protection class:	II
Material of the body:	PC
Colour temperature:	4000K
Mounting version:	Surface / suspended
Colour of the body:	Silver
Luminous flux* :	max. 3700lm
Material of the diffuser:	PC
Type of the diffuser:	Transparent
Light source:	LED GO!

* Initial, tolerance +/- 10%

SPECIFICATION

LED luminaire system designed for suspended and surface mounting on walls and ceilings. Provides a combination of high illumination parameters and functionality. With its slim diameter of 42 mm possible to mount in hard-to-reach locations. Mounting is easy and quick. Due to the line lens, it is possible to adjust the fitting to different lighting requirements- three light distribution options: 90°, 60°, 30°. Colour temperature 4000K, CRI>80, lifespan of LED 50 000h (L70B50) ta= 25°C.

APPLICATION

Luminaire intended for both outdoor and indoor use in industry areas and passageways. Provides good surface lighting and is perfect in situations that require eyesight concentration. Four housing sizes available. Suitable for mounting in all types of suspended ceilings (modular, plasterboard).

TUBE LED EVO 2



INDUSTRIAL LIGHTING

AVAILABLE OPTIONS

[Click on index to go to detailed catalogue extract](#)

Index	Rated power	Colour temperature	Luminous flux **	Material of the diffuser	Type of the diffuser	Power supply	Wiring	Energy efficiency class	Dimensions	Nominal radiation angle
» 269103	14W	4000K	1350lm	PC	TRANSPARENT		LS1	A	42/45/785mm	30°
» 269110	14W	4000K	1700lm	PC	TRANSPARENT		LS1	A+	42/45/785mm	60°
» 269127	14W	4000K	1600lm	PC	TRANSPARENT		LS1	A+	42/45/785mm	90°
» 269134	14W	4000K	1350lm	PC	TRANSPARENT		LS2	A	42/45/785mm	30°
» 269141	14W	4000K	1700lm	PC	TRANSPARENT		LS2	A+	42/45/785mm	60°
» 269158	14W	4000K	1600lm	PC	TRANSPARENT		LS2	A+	42/45/785mm	90°
» 267666	21W	4000K	2000lm	PC	TRANSPARENT	DALI	LS1	A	42/45/1065mm	30°
» 267673	21W	4000K	2500lm	PC	TRANSPARENT	DALI	LS1	A+	42/45/1065mm	60°
» 267680	21W	4000K	2350lm	PC	TRANSPARENT	DALI	LS1	A+	42/45/1065mm	90°
» 267697	21W	4000K	2000lm	PC	TRANSPARENT	DALI	LS2	A	42/45/1065mm	30°
» 267703	21W	4000K	2500lm	PC	TRANSPARENT	DALI	LS2	A+	42/45/1065mm	60°
» 267710	21W	4000K	2350lm	PC	TRANSPARENT	DALI	LS2	A+	42/45/1065mm	90°
» 269226	28W	4000K	2650lm	PC	TRANSPARENT		LS1	A	42/45/1346mm	30°
» 269233	28W	4000K	3300lm	PC	TRANSPARENT		LS1	A+	42/45/1346mm	60°
» 269240	28W	4000K	3100lm	PC	TRANSPARENT		LS1	A+	42/45/1346mm	90°
» 269257	28W	4000K	2650lm	PC	TRANSPARENT		LS2	A	42/45/1346mm	30°
» 269264	28W	4000K	3300lm	PC	TRANSPARENT		LS2	A+	42/45/1346mm	60°
» 269271	28W	4000K	3100lm	PC	TRANSPARENT		LS2	A+	42/45/1346mm	90°
» 269295	36W	4000K	4200lm	PC	TRANSPARENT		LS1	A+	42/45/1626mm	60°
» 269288	36W	4000K	3350lm	PC	TRANSPARENT		LS1	A	42/45/1626mm	30°
» 269301	36W	4000K	3950lm	PC	TRANSPARENT		LS1	A+	42/45/1626mm	90°
» 269318	36W	4000K	3350lm	PC	TRANSPARENT		LS2	A	42/45/1626mm	30°
» 269325	36W	4000K	4200lm	PC	TRANSPARENT		LS2	A+	42/45/1626mm	60°
» 269332	36W	4000K	3950lm	PC	TRANSPARENT		LS2	A+	42/45/1626mm	90°
» 267727	28W	4000K	2650lm	PC	TRANSPARENT	DALI	LS1	A	42/45/1346mm	30°
» 267734	28W	4000K	3300lm	PC	TRANSPARENT	DALI	LS1	A+	42/45/1346mm	60°
» 267741	28W	4000K	3100lm	PC	TRANSPARENT	DALI	LS1	A+	42/45/1346mm	90°
» 267758	28W	4000K	2650lm	PC	TRANSPARENT	DALI	LS2	A	42/45/1346mm	30°
» 267765	28W	4000K	3300lm	PC	TRANSPARENT	DALI	LS2	A+	42/45/1346mm	60°
» 267772	28W	4000K	3100lm	PC	TRANSPARENT	DALI	LS2	A+	42/45/1346mm	90°
» 267796	36W	4000K	4200lm	PC	TRANSPARENT	DALI	LS1	A+	42/45/1626mm	60°
» 267789	36W	4000K	3350lm	PC	TRANSPARENT	DALI	LS1	A	42/45/1626mm	30°
» 267802	36W	4000K	3950lm	PC	TRANSPARENT	DALI	LS1	A+	42/45/1626mm	90°
» 267819	36W	4000K	3350lm	PC	TRANSPARENT	DALI	LS2	A	42/45/1626mm	30°
» 267826	36W	4000K	4200lm	PC	TRANSPARENT	DALI	LS2	A+	42/45/1626mm	60°
» 267833	36W	4000K	3950lm	PC	TRANSPARENT	DALI	LS2	A+	42/45/1626mm	90°
» 269165	21W	4000K	2000lm	PC	TRANSPARENT		LS1	A	42/45/1065mm	30°
» 269189	21W	4000K	2350lm	PC	TRANSPARENT		LS1	A+	42/45/1065mm	90°
» 269172	21W	4000K	2500lm	PC	TRANSPARENT		LS1	A+	42/45/1065mm	60°

** Initial, tolerance +/- 10%

TUBE LED EVO 2

LED GO!

INDUSTRIAL LIGHTING

AVAILABLE OPTIONS

[Click on index to go to detailed catalogue extract](#)

Index	Rated power	Colour temperature	Luminous flux **	Material of the diffuser	Type of the diffuser	Power supply	Wiring	Energy efficiency class	Dimensions	Nominal radiation angle
» 269196	21W	4000K	2000lm	PC	TRANSPARENT		LS2	A	42/45/1065mm	30°
» 269202	21W	4000K	2500lm	PC	TRANSPARENT		LS2	A+	42/45/1065mm	60°
» 269219	21W	4000K	2350lm	PC	TRANSPARENT		LS2	A+	42/45/1065mm	90°

** Initial, tolerance +/- 10%

The company reserves the right to make design changes or upgrades in the presented product.
Product data sheet does not constitute an offer.

Revision date: 2017-10-02



Lena Lighting S.A.
ul. Kornicka 52
63-000 Sroda Wielkopolska

tel. +48 (61) 28 60 300
fax.+48 (61) 28 54 059
e-mail: office@lenalighting.pl
www.lenalighting.pl



The luminaire complies with the EU ROHS Directive 2011/65/UE.



This product is a subject to electric and electronic waste equipment regulations (WEEE).



89/2017