

FRAGA LED

LED GO!



220-240 V | LED |  |  | IP40 | IK08 |  CE

TECHNICAL PARAMETERS

Light source:	LED;
Ingress protection:	IP43/IP20;
Nominal power [W]:	4.00; 6.00; 11.00; 15.00
Luminous flux [lm]*:	260 - 1150
Colour temperature [K]:	3000; 4000;
Colour rendering index:	>80;
Energy efficiency class:	A+; A;
Material of the body:	aluminium, polimetakrylan metylu;
Colour of the body:	white;
Diffuser material:	PMMA;
Diffuser type:	PRM;
Mounting version:	recessed;
Working temperature [°C]:	from -20 to +35;
Supply voltage [V]:	220 - 240;
Frequency [Hz]:	50 - 60;
Dimensions [mm]:	ø85/58; ø109/60; ø138/68;

*Tolerance +/- 10%

CHARACTERISTICS

A downlight luminaire with narrow, 36° wide, light distribution angle and the light beam adjustable within +/-30°. Equipped with modern and energy-efficient COB LED light source. Its body made of aluminium and PMMA ensures optimum LED operating conditions and the diffuser made of highly transparent PMMA guarantees high luminous efficiency of the luminaire. Suitable for tool-free installation in plasterboard ceilings.

APPLICATION

Intended for indoor use in passageways and entry areas.

FRAGA LED

LEDGO!

AVAILABLE TYPES

[Click >> index, to see details](#)

FRAGA LED 4W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Energy efficiency class	Index
4	3000	260	PRM	A+	>> 059209
4	4000	270	PRM	A+	>> 059216

FRAGA LED 6W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Energy efficiency class	Index
6	3000	360	PRM	A	>> 059223
6	4000	400	PRM	A	>> 059230

FRAGA LED 11W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Energy efficiency class	Index
11	3000	640	PRM	A	>> 059247
11	4000	740	PRM	A	>> 059254

FRAGA LED 15W

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Energy efficiency class	Index
15	3000	1000	PRM	A	>> 059261
15	4000	1150	PRM	A	>> 059278

*Tolerance +/- 10%

ACCESSORIES

Name	Index
Round surface casing - white, 15W	059858
Round surface casing - white, 11W	059841


Round surface casing - white,
15W (059858)Round surface casing - white,
11W (059841)

FRAGA LED

LED GO!

LUMINOUS INTENSITY DISTRIB. CURVE

FRAGA LED 15W 4000K

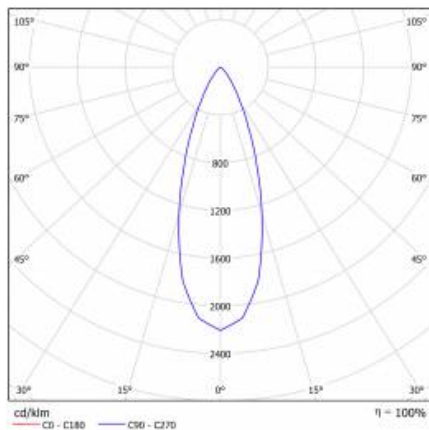

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2019-05-22



Lena Lighting S.A.
ul. Kórnicka 52
63-000 Środa Wielkopolska

tel. +48 61 28 60 300
e-mail: office@lenalighting.pl
www.lenalighting.pl



The luminaire complies with the EU RoHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



94/2017