

INDO PLX LED EVO

LED GO!



220-240 V | LED |  | IP20 | IK07

TECHNICAL PARAMETERS

Ingress protection:	IP20;
Impact resistance:	IK07;
Nominal power [W]:	34.00;
Luminous flux [lm]*:	3450 - 3700
Colour temperature [K]:	3000; 4000;
Colour rendering index:	>80;
SDCM:	≤ 3;
Energy efficiency class:	A+;
Material of the body:	powder coated steel;
Colour of the body:	white;
Diffuser material:	PMMA;
Diffuser type:	OPAL;
Mounting version:	recessed;
Dimensions [mm]:	106/595/595;

*Tolerance +/- 10%

CHARACTERISTICS

Recessed mounted square luminaire with an integrated energy-saving LED GO! light source. Powder-coated steel body. The lens diffuser is made of metal sheet and opalized PMMA. It provides comfortable and soft light.

APPLICATION

A versatile indoor luminaire designed for office rooms and areas of general public use. Suitable as a general light source for all sorts of work that require optical focus. Dedicated for new applications and as a replacement of traditional T8 and T5 tube luminaires with energy-saving LED lamps

INDO PLX LED EVO

LED GO!


AVAILABLE TYPES

Click >> [index](#), to see details

Nominal power [W]	Colour temperature [K]	Luminous flux [lm]*	Diffuser type	Energy efficiency class	Index
34	3000	3450	OPAL	A+	>> 380952
34	4000	3700	OPAL	A+	>> 380969

*Tolerance +/- 10%

LUMINOUS INTENSITY DISTRIB. CURVE

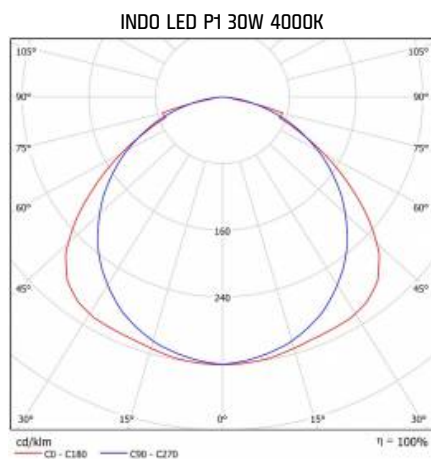

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2019-05-16



Lena Lighting S.A.
ul. Kórnicka 52
63-000 Środa Wielkopolska

tel. +48 61 28 60 300
e-mail: office@lenalighting.pl
www.lenalighting.pl



The luminaire complies with the EU RoHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).

